

Series 1401 “Outswing” Terrace Door

CSI Division 08 11 20 - Aluminum Swing Doors

12805 E. 31st St.
Tulsa, OK 74146
Phone: (800) 259-7580
Fax: (918) 665-2197

Style • Quality • Performance

Standard Features

- 1” insulated glass
- Fair Housing threshold available
- 14 standard AAMA 2604 powder coat colors
- Full range of Anodized & AAMA 2605 finishes available
- Painted or pre-finished handles
- Multipoint locking system
- 3 1/4” frame depths
- Polyamide strip structural thermal break


Performance

- AAMA Rating: AW-PG-60 (48x99)
- Air Infiltration (CFM): 0.02
- Water Resistance (PSF): 12
- Structural (PSF): 90
- STC range: 32-40
- *U-Factor: .41 / .38
- *SHGC: .26 / .24
- *VT: .45 / .39
- CRF: 61 / 58

*NFRC simulation results from certified testing labs.
Variety of glazing combinations available.



Camden Noma
Washington, DC
Bone White & Dark Gray Powder Coat

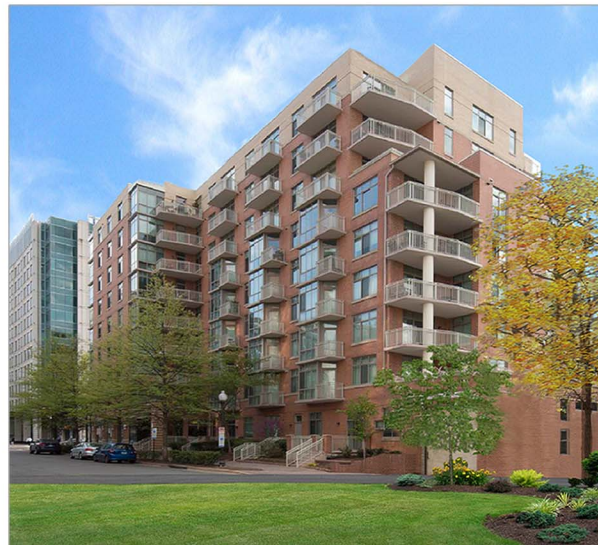

The Berkley Apartments
Springfield, VA
Bronze Powder Coat



Carlyle Block (L)
Alexandria, VA
Dark Gray Powder Coat