

Series 4100 Single Hung

CSI Division 08 51 13 - Aluminum Windows

12805 E. 31st St.
Tulsa, OK 74146
Phone: (800) 259-7580
Fax: (918) 665-2197

Style • Quality • Performance


Standard Features

- Sealed 1-in. insulated glass for optimum thermal efficiency
- High-density pile weatherstripping with mylar fin
- 14 standard powder coat colors
- Full range of Anodized and AAMA 2605 finishes available
- Fully operational lower sash tilts inward
- Sloped sill to promote water runoff
- Center cam locks plus hidden security locks
- Carbon steel spiral sash balances
- 4" frame depth available
- Interlocking meeting rails
- Extruded aluminum screen

Performance

- AAMA Rating: AW-PG75 Size: 60x99
- Air Infiltration (CFM): 0.29
- Water Resistance (PSF): 12
- Structural (PSF): 112.5
- STC range: 34
- *U-Factor: .47 / .36
- *SHGC: .30 / .20
- *VT: .53 / .37
- CRF: 57 / 52

*NFRC simulation results from certified testing labs.
Variety of glazing combinations available.

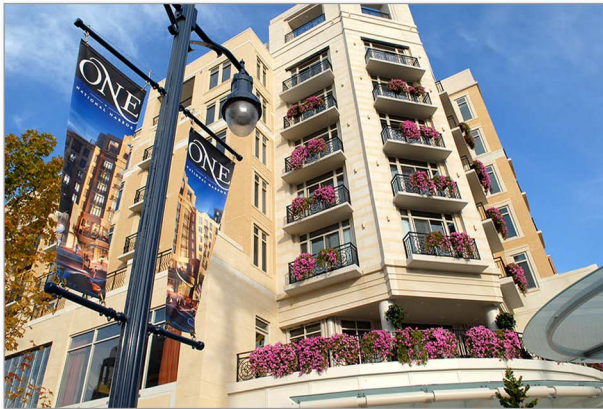

Potomac Promenade - One National Harbor
National Harbor, MD
Yosemite Sand Powder Coat



Sanctuary By the Sea
Grayton Beach, FL
Kynar Redwood



Ridgecrest South - Residence Hall
Tuscaloosa, AL
Antique White Powder Coat