



Series 550 Fixed Window

CSI Division 08 51 13 - Aluminum Windows

12805 E. 31st St.
Tulsa, OK 74146
Phone: (800) 259-7580
Fax: (918) 665-2197

Style • Quality • Performance

Standard Features

- 1" insulated glass
- Interior Glazed
- Pour and debride structural thermal break
- 14 standard powder coat colors
- Full range of Anodized and AAMA 2605 finishes available
- 2 5/8" frame depth


Performance

- AAMA Rating: AW-PG-80 Size: (60X99)
- Air Infiltration (CFM): 0.01
- Water Resistance (PSF): 12
- Structural (PSF): 120
- STC range: 32-36
- *U-Factor: .37 / .26
- *SHGC: .31 / .29
- *VT: .60 / .51
- CRF: 63 / 79

*NFRC simulation results from certified testing labs.
Variety of glazing combinations available.



Headington Hall
Norman, OK
Almond Powder Coat

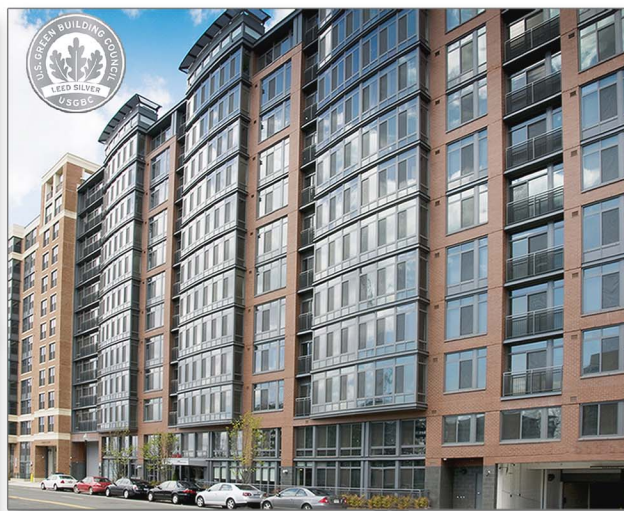

Axiom
Washington, DC
Dark Gray Powder Coat



1301 Jefferson at Thomas Circle
Washington, DC
Dark Green Powder Coat