

Series 710 Double Hung

CSI Division 08 51 13 - Aluminum Windows

12805 E. 31st St.
Tulsa, OK 74146
Phone: (800) 259-7580
Fax: (918) 665-2197

Style • Quality • Performance

Standard Features

- 3 1/4" frame depths available
- 14 standard powder coat colors
- Full range of Anodized and AAMA 2605 finishes available
- Lock-out tilt latches
- Operable sashes tilts in for easy cleaning
- Sealed 7/8" insulated glass for optimum thermal efficiency
- Extruded screen frame
- Carbon Steel spiral sash balances
- High-density pile weatherstripping with mylar fin
- Center camp locks plus hidden security locks


Performance

- AAMA Rating: CW-PG-40 Size: 48X80
- Air Infiltration (CFM): 0.01
- Water Resistance (PSF): 6.06
- Structural (PSF): 60.15
- STC range: 30-34
- *U-Factor: .49 / .37
- *SHGC: .29 / .27
- *VT: .52 / .47
- CRF: 59 / 56


*NFRC simulation results from certified testing labs.
Variety of glazing combinations available.



Ambassador Hotel
Wichita, KS
Bronze Powder Coat

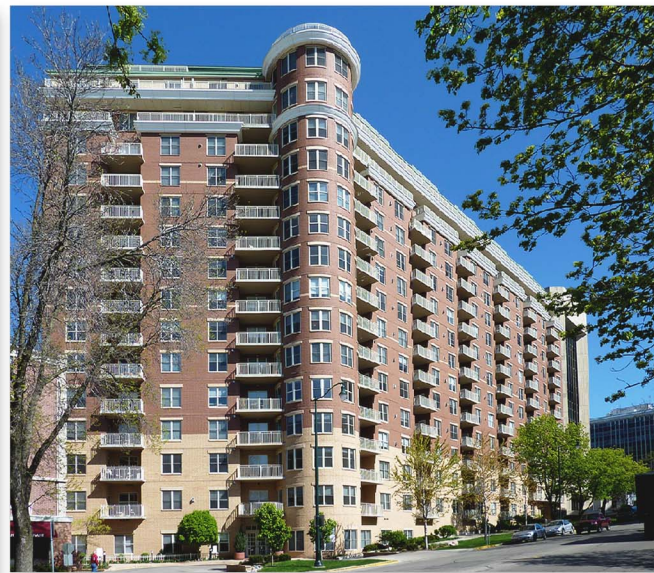

Metropolitan Place
Madison, WI
Creme Powder Coat

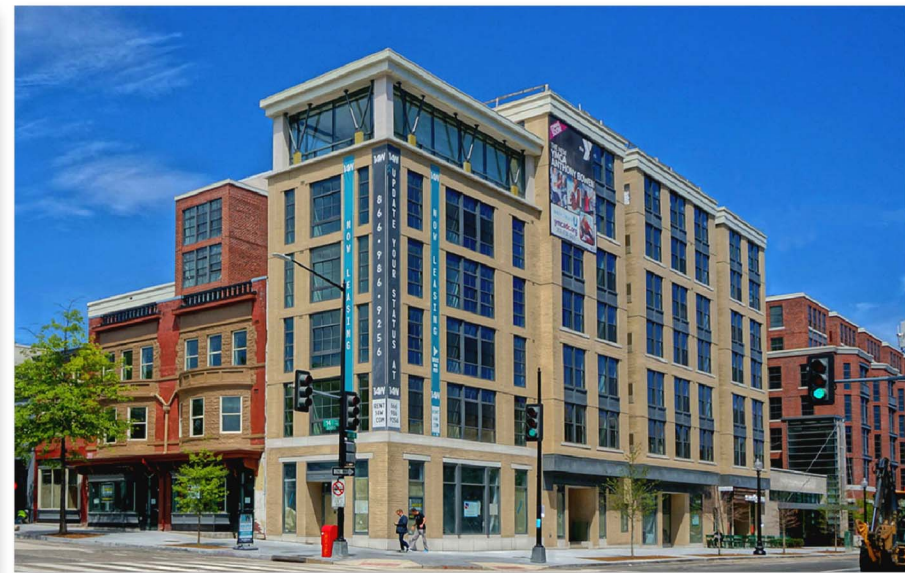

14W / YMCA Anthony Bowen.
Washington, D.C.
Dark Gray Powder Coat