

Series 800 Casement

CSI Division 08 51 13 - Aluminum Windows

12805 E. 31st St.
Tulsa, OK 74146
Phone: (800) 259-7580
Fax: (918) 665-2197

Style • Quality • Performance


Standard Features

- 1" insulated glass
- Interior Glazed
- 14 standard powder coat colors
- Full range of Anodized and AAMA 2605 finishes available
- Pour and debridge structural thermal break
- Standard Roto Operator, Push out available
- 2 5/8" frame depth
- Extruded screen frame with fiberglass mesh

Performance

- AAMA Rating: AW-PG-70 Size: 72"x60"
- Air Infiltration (CFM): 0.05
- Water Resistance (PSF): 12
- Structural (PSF): 105
- STC range: 31-40
- *U-Factor: .53 / .46
- *SHGC: .25 / .23
- *VT: .43 / .38
- CRF: 63 / 79

*NFRC simulation results from certified testing labs.
Variety of glazing combinations available.

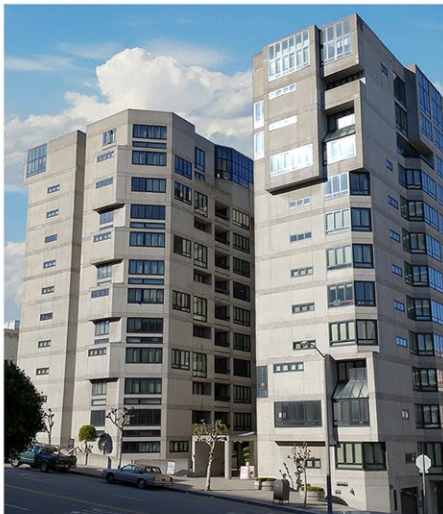

2000 Broadway
San Francisco, CA
Duranar Black



Bon Villa
Oak Park, IL
Black Powder Coat



Highland Park
Washington, DC
Clear Anodized Class II