

Series 825 Awning

CSI Division 08 51 13 - Aluminum Windows

12805 E. 31st St.
Tulsa, OK 74146
Phone: (800) 259-7580
Fax: (918) 665-2197

Style • Quality • Performance

Standard Features

- 1" insulated glass
- Interior Glazed
- 14 standard powder coat colors
- Full range of Anodized and AAMA 2605 finishes available
- Pour and debridge structural thermal break
- Standard Roto Operator, Push out available
- 2 5/8" frame depth
- Extruded screen frame with fiberglass mesh


Performance

- AAMA Rating: AW-PG-80 Size: 60"X36"
- Air Infiltration (CFM): 0.01
- Water Resistance (PSF): 12
- Structural (PSF): 120
- STC range: 1-40
- *U-Factor: .53 / .47
- *SHGC: .25 / .23
- *VT: .43 / .39
- CRF: 63 / 79

*NFRC simulation results from certified testing labs.
Variety of glazing combinations available.



Flats at Union Row
Washington, DC
Satin Gray Powder Coat and Clear Anodized

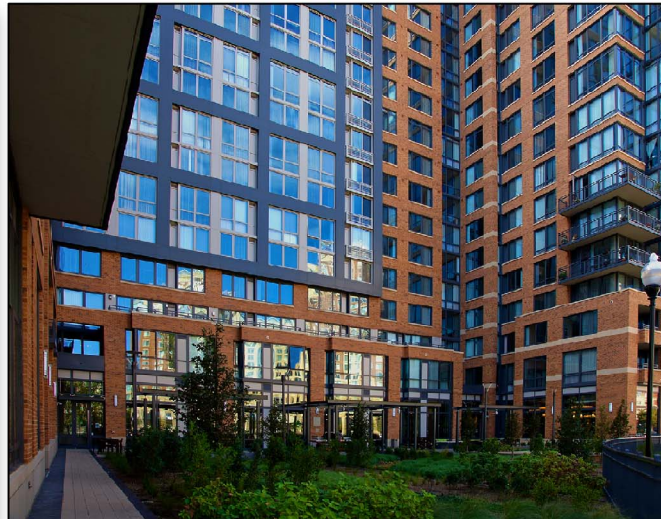

Parc Meridian
Alexandria, VA
Light Gray and Dark Gray Powder Coat



2001 Clarendon
Arlington, VA
Pewter Powder Coat