

Window & Louver PTAC Units



The PTAC unit from Thermal Windows, Inc. is a complete unit. The system comes ready to install, and does not require on-site fabrication or assembly. It can be installed quickly by two



workers. Easy installation is accomplished with integral nailing fins. Installation framing requires only a door-type rough opening.




The units are available in all Tier 1 and Tier 2 colors, as well as clear and bronze anodized finishes.



Window / Louver PTAC Units from Thermal Windows, Inc.

The best choice for your hospitality project

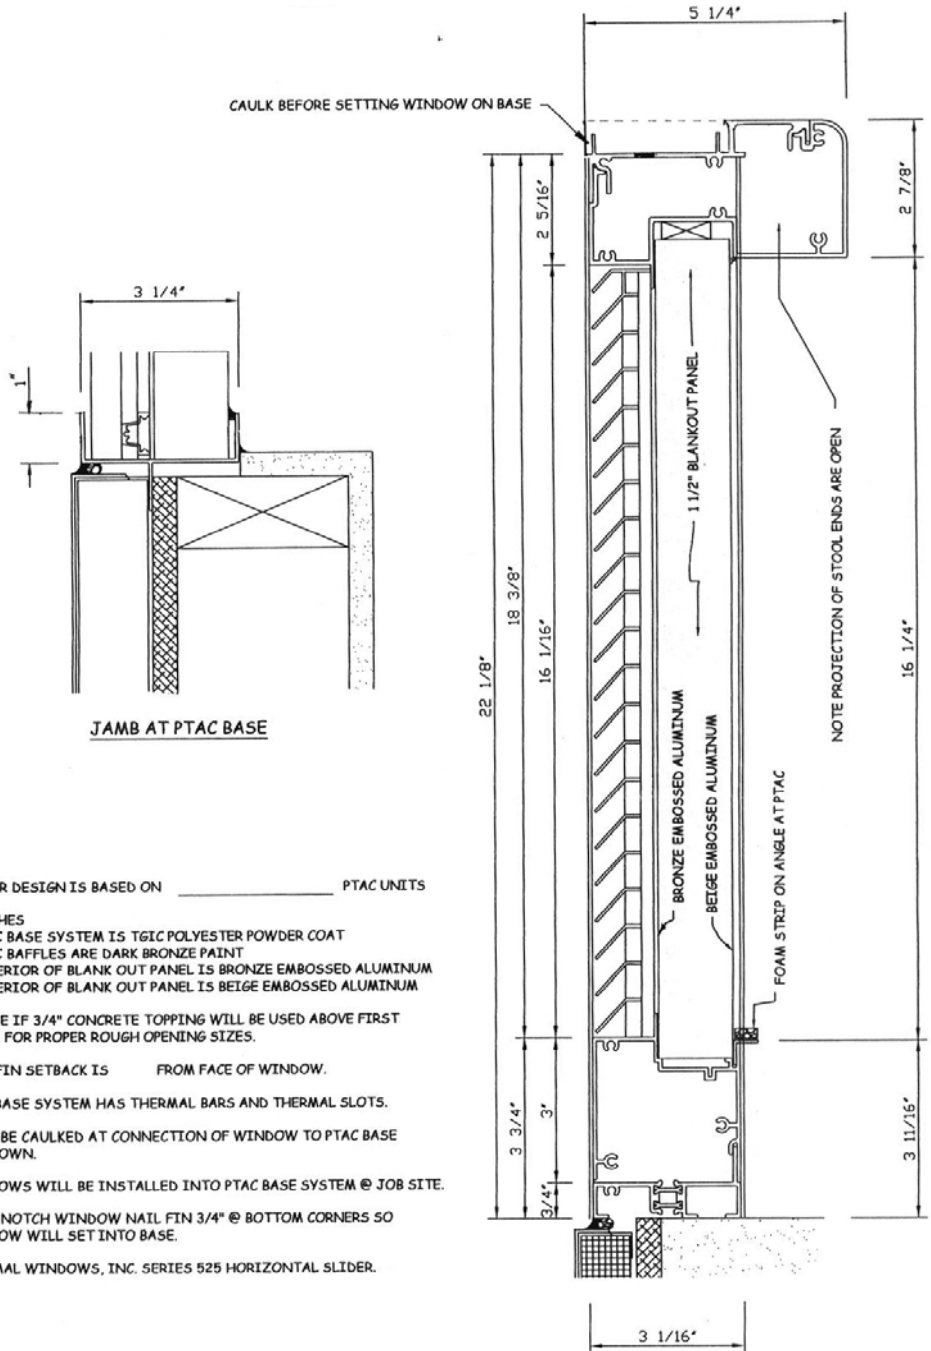

LOUVER DESIGN IS BASED ON _____ PTAC UNITS

FINISHES

PTAC BASE SYSTEM IS TGIC POLYESTER POWDER COAT
 PTAC BAFFLES ARE DARK BRONZE PAINT
 EXTERIOR OF BLANK OUT PANEL IS BRONZE EMBOSSED ALUMINUM
 INTERIOR OF BLANK OUT PANEL IS BEIGE EMBOSSED ALUMINUM

ADVISE IF 3/4" CONCRETE TOPPING WILL BE USED ABOVE FIRST FLOOR FOR PROPER ROUGH OPENING SIZES.

NAIL FIN SETBACK IS _____ FROM FACE OF WINDOW.

PTAC BASE SYSTEM HAS THERMAL BARS AND THERMAL SLOTS.

MUST BE CAULKED AT CONNECTION OF WINDOW TO PTAC BASE AS SHOWN.

WINDOWS WILL BE INSTALLED INTO PTAC BASE SYSTEM @ JOB SITE.

FIELD NOTCH WINDOW NAIL FTN 3/4" @ BOTTOM CORNERS SO WINDOW WILL SET INTO BASE.

THERMAL WINDOWS, INC. SERIES 525 HORIZONTAL SLIDER.



Thermal Windows, Inc. • 12805 E. 31st Street • Tulsa, OK 74146
 Phone: (918) 663-7580 • (800) 259-7580 • Fax: (918) 665-2197
 Email: info@thermalwindows.com • Website: www.thermalwindows.com